



100% ABSOLUTE
GUARANTEED
FOREVER

PROTECT YOUR

HARD CASES

MADE IN ITALY



www.explorercases.com

BUILT STRONGER...

The **WIDEST** range of
WATERPROOF cases
MADE IN ITALY



WATERTIGHT



INTERSTACKABLE



CORROSIONPROOF



TEMP RATING
-33°C/+90°C



SAND & DUST
PROOF



SHOCKPROOF



DESIGNED FOR
MILITARY USE



AIRTIGHT



GUARANTEED
FOREVER

TO LAST LONGER



Explorer Cases first of their kind to be made in Italy by GT LINE, the European leader in technical cases manufacturing since 1970.

Our range of virtually indestructible waterproof cases provides a reliable solution for any equipment requiring a high level of protection. Applications range from Photo and Video equipment transportation to Medical, Aerospace and Defense applications where our cases, strong of their dustproof and waterproof qualities, offer absolute protection to your content making them ideal for use in the harshest environment. All Explorer Cases are subjected to a rigorous series of controlled laboratory tests to grant their suitability for use in the most extreme and hazardous environments, all of them Certified according to IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models).



Our products are manufactured in our state-of-the-art facilities under strict ISO 9001:2015 Quality Control System and with a particular attention to reduce the environmental performance impact of our production processes by carefully managing our environmental responsibilities in a systematic manner.



FEATURES:

1. REINFORCED CORNERS
2. NBR SINGLE BLOCK O-RING SEAL
3. REMOVABLE LID (on certain models)
4. CORROSION PROOF METAL PINS
5. UNIQUE COPOLYMER PP INJECTION MOLDED BODY
6. SELF OILING WHEELS (certain mod.)
7. ERGONOMICALLY DESIGNED HANDLE
8. PRESSURE RELEASE VALVE
9. CUSTOMIZABLE NAME TAG
10. PRECUBED FOAM LAYERS
11. CONVOLUTED FOAM IN THE LID
12. PADLOCK POINTS WITH METAL REINFORCEMENT
13. JAM-FREE LATCHES, EASY TO OPEN
14. POSITIVE STACKING LOCATION



STANDARD COLORS



BLACK



ORANGE



MILITARY GREEN



DESERT SAND



PRECUBED FOAM

Standard models available empty or with layers of precubed foam in the bottom and convoluted foam in the lid. Custom foams on demand.



Introducing **HEAVENLY LIGHT**, the new standard for lightweight cases with no compromise on durability and reliability. Strong of our innovative plastic resin based on nano tech, **HEAVENLY LIGHT** are the lightest cases in their size category. Look for this logo to easily identify them among our many EXPLORER CASES models.


OUR SUPERIOR FEATURES

- Made of exclusive Copolymer Polypropylene compound, stronger than competitors
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories
- Incorporate a number of patented innovations
- All available empty or with "pick & pluck" foam layers





1908		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	85	20	65
	in	7 1/2	4 15/16	3 3/8	13/16	2 9/16
External dim.	mm	216	180	102		
	in	8 1/2	7 1/16	4		
Weight empty	kg 0,70		lbs 1.54			
Weight w/foam	kg 0,80		lbs 1.76			
Volume	lt 2,0		gal 0.52			
Buoyancy	kg/max 1,4		lbs/max 3.08			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV1908



Art. SHOULDERKIT.U



1913		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	135	20	115
	in	7 1/2	4 15/16	5 5/16	13/16	4 1/2
External dim.	mm	216	180	152		
	in	8 1/2	7 1/16	6		
Weight empty	kg 0,85		lbs 1.87			
Weight w/foam	kg 0,92		lbs 2.02			
Volume	lt 3,2		gal 0.79			
Buoyancy	kg/max 2,4		lbs/max 5.29			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV1913





2209		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	95	20	75
	in	8 11/16	6 5/16	3 3/4	13/16	2 15/16
External dim.	mm	246	215	112		
	in	9 11/16	8 7/16	4 7/16		
Weight empty	kg 0,88		lbs 1.94			
Weight w/foam	kg 0,99		lbs 2.18			
Volume	lt 3,3		gal 0.79			
Buoyancy	kg/max 2,3		lbs/max 5.07			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV2209



Art. SHOULDERKIT.U



2214		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	145	20	125
	in	8 11/16	6 5/16	5 11/16	13/16	4 15/16
External dim.	mm	246	215	162		
	in	9 11/16	8 7/16	6 3/8		
Weight empty	kg 1,16		lbs 2.56			
Weight w/foam	kg 1,29		lbs 2.84			
Volume	lt 5,1		gal 1.32			
Buoyancy	kg/max 3,9		lbs/max 8.59			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV2214

OUR FULL WARRANTY

"We want you to count on your Explorer as the most reliable case to carry your valuable equipment in the harshest environments. That's why we guarantee our cases against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside.

After all, it is not by coincidence that all of our cases have met the most rigorous military standard qualifications and are used worldwide in extremely harsh and demanding environments."

* Warranty valid according to EU laws, only if the case has not been subjected to abuse, misuse, negligence or alteration.

See full details on www.explorercases.com



2712		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	120	35	85
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8
External dim.	mm	305	270	144		
	in	12	10 5/8	5 11/16		
Weight empty	kg 1,62		lbs 3.57			
Weight w/foam	kg 1,83		lbs 4.03			
Volume	lt 6,6		gal 1.58			
Buoyancy	kg/max 4,2		lbs/max 9.25			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off
- Can accommodate BAG-R and PANEXPL27




Counterbalance supports

2712	BAG-R	DIV2712
PANEXPL27		

2717		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	170	35	135
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16
External dim.	mm	305	270	194		
	in	12	10 5/8	7 5/8		
Weight empty	kg 1,93		lbs 4.25			
Weight w/foam	kg 2,12		lbs 4.67			
Volume	lt 9,3		gal 2.37			
Buoyancy	kg/max 6,7		lbs/max 14.77			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off
- Can accommodate BAG-S and PANEXPL27



Counterbalance supports

2717	BAG-S	DIV2717
PANEXPL27		

100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION



3005		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	300	210	58	20	38
	in	11 13/16	8 1/4	2 5/16	13/16	1 1/2
External dim.	mm	326	269	75		
	in	12 13/16	10 9/16	2 15/16		
Weight empty	kg 1,10		lbs 2.42			
Weight w/foam	kg 1,20		lbs 2.64			
Volume	lt 4		gal 1.05			
Buoyancy	kg/max 2,10		lbs/max 4.62			
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	D		
	black w/foam	orange w/foam	mil. green w/foam	des. sand w/foam		
	BE	OE	GE	DE		
	black empty	orange empty	mil. green empty	des. sand empty		

- Stainless steel reinforced padlockable points
- Can be stored in vertical position
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Recessable handle keeps the case in flat horizontal position



Can be stored in vertical position



Art. SHOULDERKIT.U



Recessable low profile handle




Stainless steel reinforced padlockable points




3317		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	234	170	68	102
	in	13	9 3/16	6 11/16	2 11/16	4
External dim.	mm	360	304	194		
	in	14 3/16	11 15/16	7 5/8		
Weight empty	kg 2,29		lbs 5.04			
Weight w/foam	kg 2,51		lbs 5.53			
Volume	lt 13,1		gal 3.43			
Buoyancy	kg/max 7,0		lbs/max 15.43			
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off
- Can accommodate BAG-T and PANEXPL33



Counterbalance supports

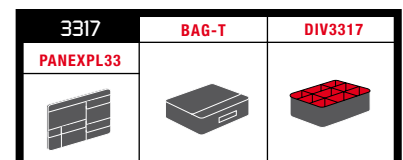


TO EXPLORE THE WORLD



3317W		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	350	170	68	102
	in	13	13 3/4	6 11/16	2 11/16	4
External dim.	mm	360	420	194		
	in	14 3/16	16 9/16	7 5/8		
Weight empty	kg 2,92		lbs 6.43			
Weight w/foam	kg 3,30		lbs 7.27			
Volume	lt 19,6		gal 5.17			
Buoyancy	kg/max 10,6		lbs/max 23.36			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	BE				
	black w/foam	black empty				

- Lid can be set to slide-off
- Can accommodate BAG-U and PANEXPL33W




Counterbalance supports

3317W	BAG-U	DIV3317W
PANEXPL33W		



3818		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	380	270	180	47	133
	in	14 15/16	10 5/8	7 1/16	1 3/4	5 5/16
External dim.	mm	410	340	205		
	in	16 1/8	13 3/8	8 1/16		
Weight empty	kg 3,14		lbs 6.92			
Weight w/foam	kg 3,58		lbs 7.89			
Volume	lt 18,4		gal 4.75			
Buoyancy	kg/max 12,4		lbs/max 27.33			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle
- Can accommodate BAG-E and PANEXPL38



Counterbalance supports

3818	BAG-E	DIV3818
PANEXPL38		



AND BEYOND



HEAVENLY LIGHT
The lightest range of cases
in their size category

4209		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	420	300	95	35	60
	in	16 9/16	11 13/16	3 3/4	1 3/8	2 3/8
External dim.	mm	457	367	118		
	in	18	14 7/16	4 5/8		
Weight empty	kg 2,0		lbs 4.85			
Weight w/foam	kg 2,4		lbs 5.29			
Volume	lt 12,0		gal 3.17			
Buoyancy	kg/max 6,8		lbs/max 14.99			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	D		
	black w/foam	orange w/foam	mil. green w/foam	des. sand w/foam		
	BE	OE	GE	DE		
	black empty	orange empty	mil. green empty	des. sand empty		
	BC					
	black w/pc bag					



Automatic purge valve

Soft grip rubber handle

- Lid can be set to slide-off
- Can fit up to 17" laptop
- Stainless steel reinforced padlockable points
- Can accommodate BAG-PC42 and PANEXPL42



New pull release latch grants additional safety, drop test proof



- 4209.B C includes:
- computer bag with shoulder strap (art. BAG-PC42)
 - organized lid panel (art. PANEXPL42)



HEAVENLY LIGHT
The lightest range of cases in their size category



4216		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	420	300	160	35	125
	in	16 9/16	11 13/16	6 5/16	1 3/8	4 15/16
External dim.	mm	457	367	183		
	in	18	14 7/16	7 3/16		
Weight empty		kg 2,4		lbs 5.29		
Weight w/foam		kg 3,0		lbs 6.61		
Volume		lt 20,0		gal 5.28		
Buoyancy		kg/max 14,2		lbs/max 31.30		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions		B	O	G	D	
		black w/foam	orange w/foam	mil. green w/foam	des. sand w/foam	
		BE	OE	GE	DE	
		black empty	orange empty	mil. green empty	des. sand empty	

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Automatic purge valve
- New pull release latch grants additional safety, drop test proof
- Can accommodate BAG-PC42 and PANEXPL42

Soft grip rubber handle



Art. SHOULDERKIT.U




New pull release latch grants additional safety, drop test proof



Automatic purge valve



Stainless steel reinforced padlockable points



BORN TO BE WILD



<<< 4412.G C includes:
 - computer bag with shoulder strap (art. BAG-PC44)
 - organized lid panel (art. PANEXPL44)
 - shoulder strap metal pins kit to hook the shoulder strap to the case (SHOULDER KIT.U)

4412		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	125	47	78
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16
External dim.	mm	474	415	149		
	in	18 11/16	16 5/16	5 7/8		
Weight empty	kg	3,40		lbs 7.49		
Weight w/foam	kg	3,90		lbs 8.59		
Volume	lt	19,2		gal 5.01		
Buoyancy	kg/max	10,7		lbs/max 23.58		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G			
	black w/foam	orange w/foam	mil. green w/foam			
	BE	OE	GE			
	black empty	orange empty	mil. green empty			
	BC		GC			
	black w/pc bag		mil. green w/pc bag			

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-PC44, DIV4412 and PANEXPL44



Art. SHOULDERKIT.U

4412	BAG-PC44	DIV4412
PANEXPL44		



4419		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	190	47	143
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8
External dim.	mm	474	415	214		
	in	18 11/16	16 5/16	8 7/16		
Weight empty	kg	4,00		lbs 8.81		
Weight w/foam	kg	4,70		lbs 10.36		
Volume	lt	29,2		gal 7.66		
Buoyancy	kg/max	19,7		lbs/max 43.43		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-A, DIV4419 and PANEXPL44



Art. SHOULDERKIT.U

4419	BAG-A	DIV4419
PANEXPL44		



WATERPROOF



4820		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	480	370	205	50	155
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8
External dim.	mm	520	435	230		
	in	20 1/2	17 1/8	9 1/16		
Weight empty	kg	4,64		lbs 10.22		
Weight w/foam	kg	5,40		lbs 11.90		
Volume	lt	35,5		gal 9.24		
Buoyancy	kg/max	24,7		lbs/max 54.45		
Temp. rating	°C	min -33	max +90	°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810G					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48

4820	BAG-F
PANEXPL48 	
BAG-PC48 	DIV4820

Art. BAG-PC48 - Splittable, padded PC and divider bag. The ideal solution for carrying and protecting both computer (17" size) and photographic equipment. Adjustable shoulder belt included. This optional bag perfectly fits into the 4820 model case.



HANDY | ROOMY | SMART

The Explorer mod. 5140 is the ideal scalable solution for transporting and protecting tools, parts and components, within a ruggedized waterproof trolley case, now upgraded with the new black reinforced telescopic trolley handle and silent wheels.

It's available in two main versions: to contain drawers or to contain complete boxes (organizers). Many different internal configurations are possible, by combining the empty or foam filled drawers, or the boxes and the wide range of optional accessories. See full details on www.explorercases.com. The Explorer Tool Chest makes the ideal companion for the professionals of the maintenance, for the medical field, defense and aviation markets.

THIS PRODUCT IS POWERED BY INTELLIRESPOND, the free App that allows for personal inventory and control of the content.



www.intellirespond.com



Telescopic handle



Ability to stack



Removable top lid



Automatic valve



4 top lid latches



4 front door latches



Padlockable points



Folding side handles



4 silent self-oiling wheels



Removable frontal lid



All drawers come out completely



Front lid can be opened up to 180°

OUR STANDARD MODELS

5140.BKT01.AH

Foam filled drawers



O-rings on upper and frontal lids

Detachable top lid

Removable tray

I.D. label

1x30H mm. drawer with bi-color pre-cubed foam

2x60H mm. drawers with bi-color pre-cubed foam

1x95H mm. drawer with bi-color pre-cubed foam

Detachable frontal lid

Label for content identification of the drawers

5140.BKT02.AH

Empty drawers



O-rings on upper and frontal lids

Detachable top lid

Removable tray

I.D. label

1x30H mm. drawer empty

2x60H mm. drawers empty

1x95H mm. drawer empty

Detachable frontal lid

Label for content identification of the drawers



5140.BKT03.AH

Empty drawers



O-rings on upper and frontal lids

Detachable top lid

Removable tray

I.D. label

4x30H mm. drawers empty

2x60H mm. drawers empty

Detachable frontal lid

Label for content identification of the drawers

Art. WL02

Art. WL03

Art. WL01

Art. WL04

Art. WL05

Optional small translucent shockproof PP component boxes. They can be stored in the top area, in the top removable tray or alternatively directly inside the drawers or organizers.













Art. AIWHEELS
4 **Optional** pivoting wheels, 2 equipped with brakes.



Art. AIPANEL PLEXI
Optional transparent lid cover. Useful for foam inserts or readable instructions.

OTHER CONFIGURATIONS

Check the table below to find your empty drawers model configuration (in yellow) or the one with precubed foam (in orange).

AIDRAW STANDARD CONFIGURATIONS TABLE					
					
MODEL	5140.B.8A	5140.B.6AL	5140.BKT03.AH	5140.B.2A3L	5140.B.4L
EMPTY	8 x AIDRAW3.E (H30 mm - 1.2 in)	6 x AIDRAW3.E (H30 mm - 1.2 in)	4 x AIDRAW3.E (H30 mm - 1.2 in)	2 x AIDRAW3.E (H30 mm - 1.2 in)	4 x AIDRAW6.E (H60 mm - 2.4 in)
		1 x AIDRAW6.E (H60 mm - 2.4 in)	2 x AIDRAW6.E (H60 mm - 2.4 in)	3 x AIDRAW6.E (H60 mm - 2.4 in)	
MODEL	5140.B.8C	5140.B.6CM	5140.B.4C2M	5140.B.2C3M	5140.B.4M
WITH FOAM	8 x AIDRAW3.F (H30 mm - 1.2 in)	6 x AIDRAW3.F (H30 mm - 1.2 in)	4 x AIDRAW3.F (H30 mm - 1.2 in)	2 x AIDRAW3.F (H30 mm - 1.2 in)	4 x AIDRAW6.F (H60 mm - 2.4 in)
		1 x AIDRAW6.F (H60 mm - 2.4 in)	2 x AIDRAW6.F (H60 mm - 2.4 in)	3 x AIDRAW6.F (H60 mm - 2.4 in)	
					
MODEL	5140.B.5AR	5140.B.2A2R	5140.B.L2R	5140.BKT02.AH	5140.B.3ALR
EMPTY	5 x AIDRAW3.E (H30 mm - 1.2 in)	2 x AIDRAW3.E (H30 mm - 1.2 in)	1 x AIDRAW6.E (H60 mm - 2.4 in)	1 x AIDRAW3.E (H30 mm - 1.2 in)	3 x AIDRAW3.E (H30 mm - 1.2 in)
	1 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW6.E (H60 mm - 2.4 in)	1 x AIDRAW6.E (H60 mm - 2.4 in)
				1 x AIDRAW9.E (H95 mm - 3.7 in)	1 x AIDRAW9.E (H95 mm - 3.7 in)
MODEL	5140.B.5CS	5140.B.2C2S	5140.B.M2S	5140.BKT01.AH	5140.B.3CMS
WITH FOAM	5 x AIDRAW3.F (H30 mm - 1.2 in)	2 x AIDRAW3.F (H30 mm - 1.2 in)	1 x AIDRAW6.F (H60 mm - 2.4 in)	1 x AIDRAW3.F (H30 mm - 1.2 in)	3 x AIDRAW3.F (H30 mm - 1.2 in)
	1 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW6.F (H60 mm - 2.4 in)	1 x AIDRAW6.F (H60 mm - 2.4 in)
				1 x AIDRAW9.F (H95 mm - 3.7 in)	1 x AIDRAW9.F (H95 mm - 3.7 in)

Check the table below to find your empty organizer model configuration (in yellow) or the one with precubed foam (in orange).

AIBOX STANDARD CONFIGURATIONS TABLE				
				
MODEL	5140X.B.7A	5140X.B.5AL	5140X.B.4AR	5140X.B.3A2L
EMPTY	7 x AIBOX3.E (H30 mm - 1.2 in)	5 x AIBOX3.E (H30 mm - 1.2 in)	4 x AIBOX3.E (H30 mm - 1.2 in)	3 x AIBOX3.E (H30 mm - 1.2 in)
		1 x AIBOX6.E (H60 mm - 2.4 in)	1 x AIBOX9.E (H95 mm - 3.7 in)	2 x AIBOX6.E (H60 mm - 2.4 in)
MODEL	5140X.B.7C	5140X.B.5CM	5140X.B.4CS	5140X.B.3C2M
WITH FOAM	7 x AIBOX3.F (H30 mm - 1.2 in)	5 x AIBOX3.F (H30 mm - 1.2 in)	4 x AIBOX3.F (H30 mm - 1.2 in)	3 x AIBOX3.F (H30 mm - 1.2 in)
		1 x AIBOX6.F (H60 mm - 2.4 in)	1 x AIBOX9.F (H95 mm - 3.7 in)	2 x AIBOX6.F (H60 mm - 2.4 in)
				
MODEL	5140X.B.2ALR	5140X.B.A3L	5140X.B.A2R	5140X.B.2LR
EMPTY	2 x AIBOX3.E (H30 mm - 1.2 in)	1 x AIBOX3.E (H30 mm - 1.2 in)	1 x AIBOX3.E (H30 mm - 1.2 in)	2 x AIBOX6.E (H60 mm - 2.4 in)
	1 x AIBOX6.E (H60 mm - 2.4 in)	3 x AIBOX6.E (H60 mm - 2.4 in)	2 x AIBOX9.E (H95 mm - 3.7 in)	1 x AIBOX9.E (H95 mm - 3.7 in)
	1 x AIBOX9.E (H95 mm - 3.7 in)			
MODEL	5140X.B.2CMS	5140X.B.C3M	5140X.B.C2S	5140X.B.2MS
WITH FOAM	2 x AIBOX3.F (H30 mm - 1.2 in)	1 x AIBOX3.F (H30 mm - 1.2 in)	1 x AIBOX3.F (H30 mm - 1.2 in)	2 x AIBOX6.F (H60 mm - 2.4 in)
	1 x AIBOX6.F (H60 mm - 2.4 in)	3 x AIBOX6.F (H60 mm - 2.4 in)	2 x AIBOX9.F (H95 mm - 3.7 in)	1 x AIBOX9.F (H95 mm - 3.7 in)
	1 x AIBOX9.F (H95 mm - 3.7 in)			


AIDRAW & AIBOX



Starting from the completely empty tool chest mod. 5140.BKTEAH (p. 18) you can build your own internal assortment of DRAWERS (AIDRAW), mixing empty and foam filled ones, respecting the possible combinations as shown on page 16.

AIDRAW

Shock-proof PP drawers available in 3 different heights, 30, 60 and 95 mm. (1.2, 2.4, 3.7 in.) designed to contain all kinds of components and accessories. Available completely empty (.E) or with pre-cubed foam (.F).

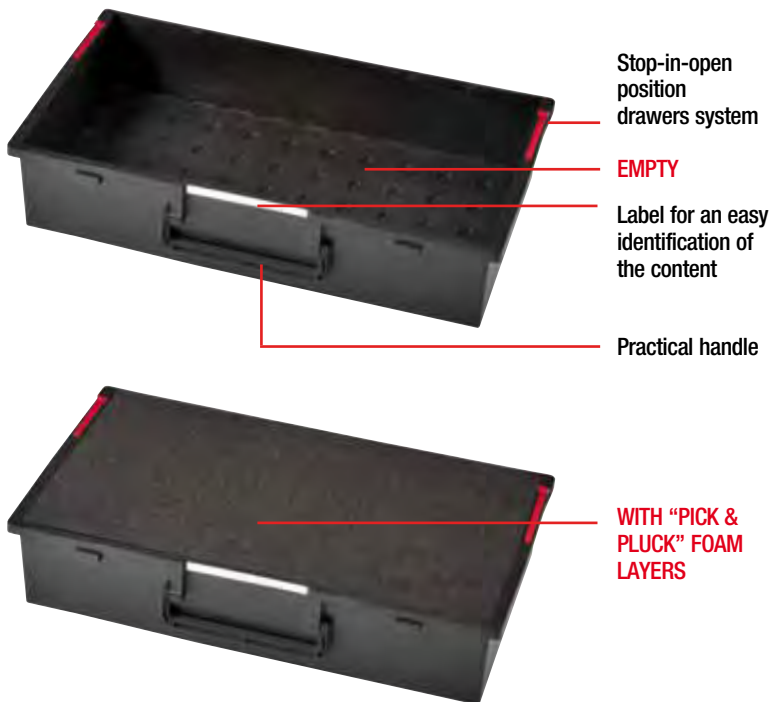

3 DIFFERENT HEIGHTS
2 INTERNAL CONFIGURATIONS

AIDRAW - TABLE				
DESCR.	#	ART.	INT. CONFIG.	INT. DIM. (mm)
DRAWER	A	AIDRAW3.E	EMPTY	467x255xH30
DRAWER	C	AIDRAW3.F	WITH FOAM	467x255xH30
DRAWER	L	AIDRAW6.E	EMPTY	467x255xH60
DRAWER	M	AIDRAW6.F	WITH FOAM	467x255xH60
DRAWER	R	AIDRAW9.E	EMPTY	467x255xH95
DRAWER	S	AIDRAW9.F	WITH FOAM	467x255xH95

Starting from the completely empty tool chest mod. 5140X.B (p. 18) you can build your own internal assortment of BOXES (AIBOX), mixing empty and foam filled ones, respecting the possible combinations as shown on page 16.

AIBOX

The ultimate modular solution for the storage, transport and use of sets of spare parts, components and tools. Available in 3 different heights, 30, 60 and 95 mm. (1.2, 2.4, 3.7 in.) they can be stacked positively and can stand in vertical position. The same footprint of both bottom and lid, grants a positive stacking even between organizers of different height. Available completely empty (.E) or with pre-cubed foam (.F).



3 DIFFERENT HEIGHTS
2 INTERNAL CONFIGURATIONS

AIBOX - TABLE				
DESCR.	#	ART.	INT. CONFIG.	INT. DIM. (mm)
ORGANIZER	A	AIBOX3.E	EMPTY	467x255xH30
ORGANIZER	C	AIBOX3.F	WITH FOAM	467x255xH30
ORGANIZER	L	AIBOX6.E	EMPTY	467x255xH60
ORGANIZER	M	AIBOX6.F	WITH FOAM	467x255xH60
ORGANIZER	R	AIBOX9.E	EMPTY	467x255xH95
ORGANIZER	S	AIBOX9.F	WITH FOAM	467x255xH95

LET'S CUSTOMIZE IT!



USE IT WITH DRAWERS (AIDRAW)

5140.BKTEAH

Empty case - drawers ready

Side rails can fit a maximum of 8 AIDRAW for a maximum of 10 different standard configurations already available for orders (see table on p. 16).

Mixed configurations of empty + foam drawers can be available on demand (see p. 17).



USE IT WITH ORGANIZERS (AIBOX)

5140X.B

Empty case - organizers ready

Side rails can fit a maximum of 7 AIBOX for a maximum of 8 different standard configurations already available for orders (see table on p. 16).

Mixed configurations of empty + foam organizers can be available on demand (see p. 17).



5140.BE.AH

Completely empty

5140		L	W	D	LID	BASE
		LENGTH	WIDTH	DEPTH		
External dim.	mm	581	381	455		
	in	22 7/8	15	17 15/16		
VERSIONS	BKT01.AH	black - w/foam filled drawers		Weight	kg 13,80	lbs 30.42
	BKT02.AH	black - w/empty drawers		Weight	kg 13,00	lbs 28.66
	BKT03.AH	black - w/empty drawers		Weight	kg 13,80	lbs 30.42
	BKTE.AH	black - AIDRAW ready		Weight	kg 9,75	lbs 21.49
	BE.AH	black - completely empty		Weight	kg 7,52	lbs 16.57
	X.B	black - AIBOX ready		Weight	kg 9,75	lbs 21.49
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

OUR CABIN CASES



5117		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	173	50	123
	in	20 3/8	10 7/8	6 13/16	1 15/16	4 13/16
External dim.	mm	546	347	197		
	in	21 1/2	13 11/16	7 3/4		
Weight empty	kg 3,80		lbs 8.37			
Weight w/foam	kg 4,50		lbs 9.92			
Volume	lt 24,7		gal 6.34			
Buoyancy	kg/max 15,8		lbs/max 34.83			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Soft grip rubber handle
- Can accommodate BAG-B, DIV51 and PANEXPL51



Art. SHOULDERKIT.U

5117-5122	BAG-B	DIV51
PANEXPL51		



5122		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	217	50	167
	in	20 3/8	10 7/8	8 9/16	1 15/16	6 9/16
External dim.	mm	546	347	247		
	in	21 1/2	13 11/16	9 3/4		
Weight empty	kg 6,00		lbs 13.22			
Weight w/foam	kg 7,00		lbs 15.43			
Volume	lt 31,0		gal 8.18			
Buoyancy	kg/max 21,5		lbs/max 47.39			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off
- Soft grip rubber handle and retractable handle
- Wheels with bearings
- Can accommodate BAG-B, DIV51 and PANEXPL51



Easy to open release retractable handle



5117-5122	BAG-B	DIV51
PANEXPL51		

ROAD WARRIORS



Optional shipping label holder (Art. KIN.1224)



New pull release latch grants additional safety, drop test proof



HEAVENLY LIGHT

The lightest range of cases in their size category

* Complies with low-cost airlines' size restrictions.

5218		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	520	285	180	30	150
	in	20 1/2	11 1/4	7 1/16	1 3/16	5 7/8
External dim.	mm	550	350	200		
	in	21 5/8	13 3/4	7 7/8		
Weight empty	kg 3,75		lbs 8.26			
Weight w/foam	kg 4,30		lbs 9.47			
Volume	lt 26,6		gal 7.02			
Buoyancy	kg/max 20,0		lbs/max 44.09			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Mod.	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Lid can be set to slide-off
- New soft grip rubber handle
- Retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate DIV52 and PANEXPL52



Self-oiling free running wheels

5218-5221	DIV52
PANEXPL52	

BACKPACK CABIN



This practical kit adds backpack transportability to models 5218 and 5221. More details on p. 37.





APPROVED

Optional shipping label holder (Art. KIN.1224)



New pull release latch grants additional safety, drop test proof



HEAVENLY LIGHT
The lightest range of cases in their size category


* Complies with major airlines' size restrictions.

5221		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	520	285	205	55	150
	in	20 1/2	11 1/4	8 1/16	2 3/16	5 7/8
External dim.	mm	550	350	225		
	in	21 5/8	13 3/4	8 7/8		
Weight empty	kg	3,90		lbs 8.59		
Weight w/foam	kg	4,50		lbs 9.92		
Volume	lt	30,3		gal 8.00		
Buoyancy	kg/max	20,0		lbs/max 44.09		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Mod.	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Lid can be set to slide-off
- New soft grip rubber handle
- Retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate DIV52 and PANEXPL52



Self-oiling free running wheels



OUR CERTIFICATIONS



5325		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	607	475	275		
	in	23 7/8	18 11/16	10 13/16		
Weight empty	kg	7		lbs 15.43		
Weight w/foam	kg	8,25		lbs 18.18		
Volume	lt	53		gal 14.00		
Buoyancy	kg/max	37,2		lbs/max 82.01		
Temp. rating	°C	min -33	max +90	°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Two men lift side handles
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53



Easy to open release retractable handle



Two men lift side handles
Stainless steel reinforced padlockable points

5325-5326	2x BAG-V
PANEXPL53	
2x DIV53	1x BAG-V + 1x DIV53



5326		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	627	475	292		
	in	24 11/16	18 11/16	11 1/2		
Weight empty	kg	10		lbs 22.04		
Weight w/foam	kg	11,25		lbs 24.80		
Volume	lt	53		gal 14.00		
Buoyancy	kg/max	37,2		lbs/max 82.01		
Temp. rating	°C	min -33	max +90	°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off
- Stainless steel padlockable points
- Two men lift side handles
- Self-oiling free running wheels
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53





There are many different kinds of waterproof cases available on the market, but only Explorer Cases can guarantee superior features of excellence.

As a matter of fact, they feature the highest number of patented innovations.

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)


- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) on demand

Certificates available for download on www.explorercases.com



5822		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	650	510	245		
	in	25 9/16	20 1/16	9 5/8		
Weight empty	kg	7,16		lbs 15,78		
Weight w/foam	kg	8,39		lbs 18,49		
Volume	lt	56,1		gal 14,79		
Buoyancy	kg/max	36,7		lbs/max 80,90		
Temp. rating	°C	min -33	max +90	°F min -27,4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Two men lift side handles
- Stainless steel reinforced padlockable points
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58



Soft grip rubber handle

TOUGH CASES FOR A



		5823		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	580	440	220	60	160		
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16		
External dim.	mm	670	510	262				
	in	26 3/8	20 1/16	10 5/16				
Weight empty	kg	9,17		lbs		20.21		
Weight w/foam	kg	10,40		lbs		22.92		
Volume	lt	56,1		gal		14.79		
Buoyancy	kg/max	36,7		lbs/max		80.90		
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)							
Versions	B	O	G	BE	OE	GE		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Two men lift side handles
- Stainless steel padlockable points
- Self-oiling free running wheels
- Soft grip rubber handle
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58

5822-5823		2x BAG-G
PANEXPL58		
2x DIV58	1x BAG-G + 1x DIV58	



		5833		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	580	440	330	60	270		
	in	22 13/16	17 5/16	13	2 3/8	10 5/8		
External dim.	mm	670	510	372				
	in	26 3/8	20 1/16	14 5/8				
Weight empty	kg	10,54		lbs		23.23		
Weight w/foam	kg	12,65		lbs		27.88		
Volume	lt	84,2		gal		22.19		
Buoyancy	kg/max	62,0		lbs/max		136.68		
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)							
	MIL-STD 810F							
Versions	B	O	G	BE	OE	GE		
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty		

- Two men lift side handles
- Stainless steel padlockable points
- Self-oiling free running wheels
- Soft grip rubber handle
- Can accommodate 1xDIV58.1+1xDIV58+1xDIV58.2, 2xDIV58+2xDIV58.2, 2xDIV58.1, 1xBAG-G+1xDIV58.2+1xDIV58.1, 2xBAG-G+2xDIV58.2, PANEXPL58

5833		1x DIV58.1 + 1x DIV58 + 1x DIV58.2
PANEXPL58		
2x DIV58 + 2x DIV58.2	2x DIV58.1	
1x BAG-G + 1x DIV58.2 + 1x DIV58.1	2x BAG-G + 2x DIV58.2	

TOUGH WORLD



NEW



Retractable handle



HEAVENLY LIGHT
The lightest range of cases
in their size category

7626		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	763	399	260	50	210
	in	30 1/16	15 11/16	10 1/4	1 15/16	8 1/4
External dim.	mm	832	466	279		
	in	32 3/4	18 3/8	11		
Weight empty	kg 7,7		lbs 16.97			
Weight w/foam	kg 9,5		lbs 20.94			
Volume	lt 79,2		gal 20.92			
Buoyancy	kg/max 57,5		lbs/max 126.77			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	D		
	black w/foam	orange w/foam	mil. green w/foam	des. sand w/foam		
	BE	OE	GE	DE		
	black empty	orange empty	mil. green empty	des. sand empty		

- Stainless steel reinforced padlockable points
- Large front handle



Two men lift side handles



Wider pull release latches



Shipping label holder



Large self-oiling free running wheels

TO PROTECT YOUR MOST

NEW



HEAVENLY LIGHT
The lightest range of cases in their size category

7635		L	W	D		
	LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	763	399	350	50	300
	in	30 1/16	15 11/16	13 3/4	1 15/16	11 13/16
External dim.	mm	832	466	369		
	in	32 3/4	18 3/8	14 1/2		
Weight empty	kg 9,4		lbs 20.72			
Weight w/foam	kg 11,8		lbs 26.01			
Volume	lt 106,6		gal 28.16			
Buoyancy	kg/max 82,2		lbs/max 181.22			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	D		
	black w/foam	orange w/foam	mil. green w/foam	des. sand w/foam		
	BE	OE	GE	DE		
	black empty	orange empty	mil. green empty	des. sand empty		

- Stainless steel reinforced padlockable points
- Large front handle



Two men lift side handles



Wider pull release latches



Shipping label holder



Large self-oiling free running wheels

VALUABLE ITEMS



Two men lift side handles

7630		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	305	60	245
	in	30 1/8	19 1/8	12	2 3/8	9 5/8
External dim.	mm	860	560	355		
	in	33 7/8	22 1/16	14		
Weight empty	kg	13,56		lbs	29.89	
Weight w/foam	kg	16,39		lbs	36.13	
Volume	lt	113,1		gal	29.85	
Buoyancy	kg/max	81,8		lbs/max	180.33	
Temp. rating	°C	min -33 max +90		°F	min -27.4 max +194	
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810F - ATA 300					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles and large front handle
- Stainless steel reinforced padlockable points
- Self-oiling free running wheels
- Can accommodate 4xBAG-L, 2xBAG-M, 2xBAG-L+1xBAG-M, 2xDIV7630 or 2xBAG-L+1xDIV7630 and PANEXPL76



7630	4x BAG-L
PANEXPL76	
2x DIV7630	2x BAG-M
2x BAG-L + 1x DIV7630	2x BAG-L + 1x BAG-M



Explorer Cases are available in a wide selection of sizes, in four standard colours and two main standard configurations: empty or with “pick & pluck” foam layers. Special colours are available on request depending on quantity. The clean internal volume provides the ideal solution to create a custom foam fitting. In addition the cases are moulded with special “slots”, fixing points where a mechanical fixing with the case can be easily achieved by using the optional exclusive hardware.




Two men lift side handles



7641		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	415	60	355
	in	30 1/8	19 1/8	16 5/16	2 3/8	14
External dim.	mm	860	560	460		
	in	33 7/8	22 1/16	18 1/8		
Weight empty	kg	15,02		lbs 33.11		
Weight w/foam	kg	18,87		lbs 41.60		
Volume	lt	153,9		gal 40.41		
Buoyancy	kg/max	118,5		lbs/max 261.24		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810F					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate 4xBAG-O, 2xBAG-P, 2xBAG-O+1xBAG-P, 2xDIV7641, 2xBAG-O+1xDIV7641 and PANEXPL76

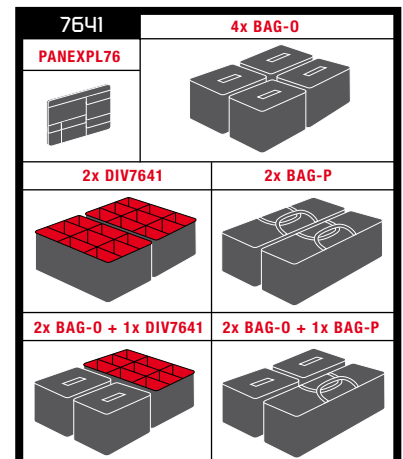

LIGHTWEIGHT ON THE GO




Fold flat carry handle



HEAVENLY LIGHT
The lightest range of cases in their size category

7726		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	770	580	265	90	175
	in	30 5/16	22 13/16	10 7/16	3 9/16	6 7/8
External dim.	mm	836	641	304		
	in	32 15/16	25 1/4	11 15/16		
Weight empty	kg	10,30		lbs 22.70		
Weight w/foam	kg	12,60		lbs 27.77		
Volume	lt	118		gal 31.17		
Buoyancy	kg/max	70		lbs/max 154.32		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Large front handle
- Side handles
- Self-oiling wheels
- Automatic purge valve
- Stainless steel padlockable points
- Can accommodate 2xDIV77 and PANEXPL77

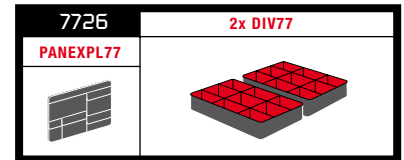

Shipping label holder




Retractable handle



HEAVENLY LIGHT
The lightest range of cases in their size category

7745		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	770	580	450	90	360
	in	30 5/16	22 13/16	17 11/16	3 9/16	14 3/16
External dim.	mm	836	641	489		
	in	32 15/16	25 1/4	14 3/16		
Weight empty	kg	15,50		lbs 34.17		
Weight w/foam	kg	19,80		lbs 43.65		
Volume	lt	200		gal 52.83		
Buoyancy	kg/max	144		lbs/max 317.47		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Large front handle
- Side handles
- Self-oiling wheels
- Automatic purge valve
- Stainless steel padlockable points
- Can accommodate 4xDIV77, 2xDIV7745, 1xDIV7745+2xDIV77 and PANEXPL77

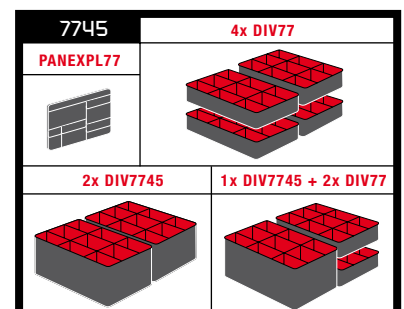

Shipping label holder



HEAVENLY LIGHT
The lightest range of cases in their size category

7814		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	780	350	145	42	103
	in	30 11/16	13 3/4	5 11/16	1 5/8	4 1/16
External dim.	mm	846	427	167		
	in	33 5/16	16 13/16	6 9/16		
Weight empty	kg	5,50		lbs 12.12		
Weight w/foam	kg	6,40		lbs 14.11		
Volume	lt	39,6		gal 10.46		
Buoyancy	kg/max	25,3		lbs/max 55.77		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Optional shoulder strap available (Art. SHOULDERKIT.U)



Art. SHOULDERKIT.U



Automatic purge valve



New pull release latch grants additional safety, drop test proof

Stainless steel reinforced padlockable points

Rubber grip handle

Two side handles for easier transportation

XL WATERPROOF CASES



New pull release latches



Wheels with bearings

Automatic purge valve

9413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	939	352	137	43	94
	in	36 15/16	13 7/8	5 3/8	1 11/16	3 11/16
External dim.	mm	989	415	157		
	in	38 15/16	16 5/16	6 3/16		
Weight empty	kg	6,70		lbs 14.77		
Weight w/foam	kg	7,70		lbs 16.97		
Volume	lt	45,3		gal 11.96		
Buoyancy	kg/max	27,9		lbs/max 61.50		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)



3-digits locks on demand (case code + DL)



9433		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	936	350	330	42	288
	in	36 7/8	13 3/4	13	1 5/8	11 5/16
External dim.	mm	1009	412	354		
	in	39 3/4	16 1/4	13 15/16		
Weight empty	kg	10,20		lbs 22.48		
Weight w/foam	kg	12,70		lbs 27.99		
Volume	lt	108		gal 28.53		
Buoyancy	kg/max	84,9		lbs/max 187.17		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	D		
	black w/foam	orange w/foam	mil. green w/foam	des. sand w/foam		
	BE	OE	GE	DE		
	black empty	orange empty	mil. green empty	des. sand empty		

- Two men lift side handles and large front handle
- Automatic purge valve
- Large self oiling free running wheels



3-digits locks on demand (case code + DL)



New pull release latches and stainless steel padlockable points



Shipping label holder

A WIDE RANGE



11413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1136	350	135	42	93
	in	44 3/4	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1189	415	159		
	in	46 13/16	16 5/16	6 1/4		
Weight empty	kg 7,80		lbs 17.19			
Weight w/foam	kg 8,80		lbs 19.40			
Volume	lt 53,7		gal 14.18			
Buoyancy	kg/max 33,3		lbs/max 73.41			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- New pull release latches
- Automatic purge valve
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)



Art. SHOULDERKIT.U



3-digits locks on demand (case code + DL)



13513		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	135	42	93
	in	53 1/8	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1430	415	159		
	in	56 5/16	16 5/16	6 1/4		
Weight empty	kg 8,70		lbs 19.18			
Weight w/foam	kg 9,95		lbs 21.93			
Volume	lt 63,7		gal 16.82			
Buoyancy	kg/max 39,5		lbs/max 87.08			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- New pull release latches
- Automatic purge valve
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)




Art. SHOULDERKIT.U



3-digits locks on demand (case code + DL)



TO CHOOSE FROM

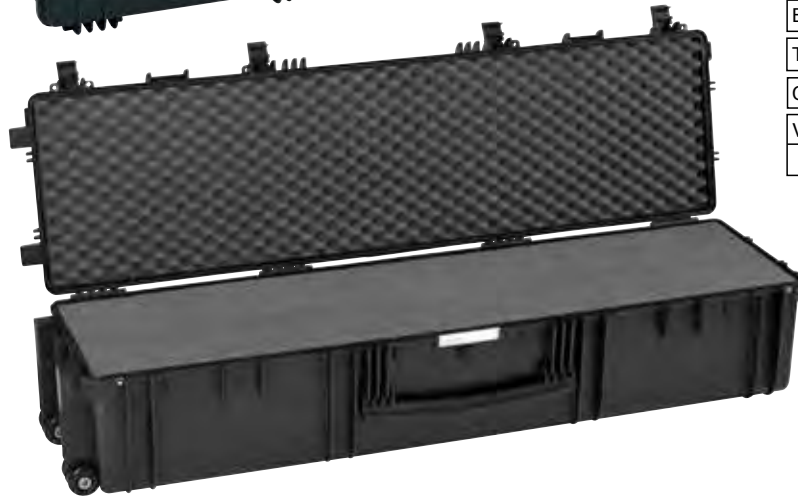

13527		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	272	42	230
	in	53 1/8	13 3/4	10 11/16	1 5/8	9 1/16
External dim.	mm	1430	415	296		
	in	56 5/16	16 5/16	11 5/8		
Weight empty	kg 11,70		lbs 25.79			
Weight w/foam	kg 14,90		lbs 32.84			
Volume	lt 128,5		gal 33.94			
Buoyancy	kg/max 97,5		lbs/max 214.95			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- 6 wheels with bearings



3-digits locks on demand (case code + DL)



Two men lift side handles



Double automatic purge valves



New wide pull release latches



3-digits locks on demand (case code + DL)

15416		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1540	377	160	42	118
	in	60 5/8	14 13/16	6 5/16	1 5/8	4 5/8
External dim.	mm	1629	456	183		
	in	64 1/8	17 15/16	7 3/16		
Weight empty	kg 11,30		lbs 24.91			
Weight w/foam	kg 13,40		lbs 29.54			
Volume	lt 92,9		gal 24.54			
Buoyancy	kg/max 61,6		lbs/max 135.80			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Self-oiling free running wheels
- Stainless steel reinforced padlockable points



Stainless steel padlockable points and metal latches



Optional 3-digits locks (case code + DL)



Two men lift side handles



4 self-oiling free running wheels

VERSIONS

10826.B
black - with plastic latches, hinged lid and metal support stays, internal precubed foam layers, convoluted foam in the lid.

10826.BE
black - with plastic latches, hinged lid and metal support stays, empty.



10826		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	260	60	200
	in	42 1/2	24 7/16	10 1/4	2 3/8	7 7/8
External dim.	mm	1178	725	287		
	in	46 3/8	28 1/4	11 5/16		
Weight empty	kg	17		lbs 37.47		
Weight w/foam	kg	20,40		lbs 44.97		
Weight w/multi weapons foam	kg	19,60		lbs 43.21		
Volume	lt	174		gal 45.96		
Buoyancy	kg/max	120,6		lbs/max 265.87		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

ROOMY AND RUGGEDIZED



12 HEAVY DUTY METAL LATCHES grant a more reliable retaining during rough handling.



4 self-oiling free running wheels



Optional 3-digits locks (case code + DL)



VERSIONS

- 10840.B
black - with foam
- 10840.G
mil. green - with foam
- 10840.BE
black - empty
- 10840.GE
mil. green - empty



Art. PANDIV.10840
Optional.
To hold the lid foam content steady in place.
The kit includes:
- 1 alveolar polypropylene sheet
- 4 velcro straps
- 8 metal loops and fixing hardware

	10840		L	W	D		
	LENGTH	WIDTH	DEPTH	LID	BASE		
Internal dim.	mm	1080	620	400	200	200	
	in	42 1/2	24 7/16	15 3/4	7 7/8	7 7/8	
External dim.	mm	1178	718	427			
	in	46 3/8	28 1/4	16 13/16			
Weight empty	kg	19,80					lbs 43.65
Weight w/foam	kg	26,30					lbs 57.32
Weight w/multi weapons foam	kg	25,00					lbs 55.11
Volume	lit	260					gal 68.68
Buoyancy	kg/max	120,6					lbs/max 265.87
Temp. rating	°C	min -33 max +90					°F min -27.4 max +194
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

- Detachable lid for easier access
- Folding side handles on both shells
- Two men lift large folding side handles

ACCESSORIES FOR PHOTO

PHOTO DIVIDERS

Modular dividers to protect and transport sensitive equipment.



DIV1908 (fits mod. 1908)
Ext. Dim. 185x120x65 mm.
7 5/16 x 4 3/4 x 2 9/16 in.



DIV1913 (fits mod. 1913)
Ext. Dim. 185x120x115 mm.
7 5/16 x 4 3/4 x 4 1/2 in.



DIV2209 (fits mod. 2209)
Ext. Dim. 215x155x75 mm.
8 7/16 x 6 1/8 x 2 15/16 in.



DIV2214 (fits mod. 2214)
Ext. Dim. 215x155x125 mm.
8 7/16 x 6 1/8 x 4 15/16 in.



DIV2712 (fits mod. 2712)
Ext. Dim. 270x195x80 mm.
10 5/8 x 7 11/16 x 3 1/8 in.



DIV2717 (fits mod. 2717)
Ext. Dim. 270x195x125 mm.
10 5/8 x 7 11/16 x 4 15/16 in.



DIV3317 (fits mod. 3317)
Ext. Dim. 325x230x100 mm.
12 13/16 x 9 1/16 x 3 15/16 in.



DIV3317W (fits mod. 3317W)
Ext. Dim. 325x340x100 mm.
12 13/16 x 13 3/8 x 3 15/16 in.



DIV3818 (fits mod. 3818)
Ext. Dim. 375x265x130 mm.
14 3/4 x 10 7/16 x 5 1/8 in.



DIV4412 (fits mod. 4412)
Ext. Dim. 440x330x80 mm.
17 5/16 x 13 x 3 1/8 in.



DIV4419 (fits mod. 4419)
Ext. Dim. 440x330x135 mm.
17 5/16 x 13 x 5 5/16 in.



DIV4820 (fits mod. 4820)
Ext. Dim. 475x365x145 mm.
18 11/16 x 14 3/8 x 5 11/16 in.



DIV51 (fits mod. 5117-5122)
Ext. Dim. 510x265x120 mm.
20 1/16 x 10 7/16 x 4 3/4 in.



DIV52 (fits mod. 5218-5221)
Ext. Dim. 515x275x120 mm.
20 1/4 x 10 13/16 x 4 3/4 in.



DIV53 (fits mod. 5325-5326)
Ext. Dim. 520x395x100 mm.
20 1/2 x 15 9/16 x 3 15/16 in.



DIV58 (fits mod. 5822-5823-5833)
Ext. Dim. 430x275x155 mm.
16 15/16 x 10 13/16 x 6 1/8 in.



DIV58.1 (fits mod. 5833)
Ext. Dim. 430x275x265 mm.
16 15/16 x 10 13/16 x 10 7/16 in.



DIV58.2 (fits mod. 5833)
Ext. Dim. 430x275x110 mm.
16 15/16 x 10 13/16 x 0 7/16 in.



DIV7630 (fits mod. 7630)
Ext. Dim. 470x375x240 mm.
18 1/2 x 14 3/4 x 9 7/16 in.



DIV7641 (fits mod. 7641)
Ext. Dim. 470x375x345 mm.
18 1/2 x 14 3/4 x 13 9/16 in.



DIV77 (fits mod. 7726)
Ext. Dim. 570x375x175 mm.
22 7/16 x 14 3/4 x 6 7/8 in.



DIV7745 (fits mod. 7745)
Ext. Dim. 580x370x345 mm.
22 13/16 x 14 9/16 x 13 9/16 in.



DRONE DIVIDER

DIVIDER FOR
LARGER DRONES
Internal adjustable
partitions

DRN77 (fits mod. 7745)
Ext. Dim. 740x570x350 mm.
29 1/8 x 22 7/16 x 13 3/4 in.
(COV77 included).



Elastic bands with Velcro
to help fixing small
equipment.
Always included with the
dividers.

*Color of the interior fabric may be different.

AND VIDEO PRO'S



COVERS FOR DIVIDERS

Top covers are available for larger models (on demand).



- COV44 (fits mod. 4412-4419)
- COV48-76 (fits mod. 4820-7630-7641)
- COV51 (fits mod. 5117-5122)
- COV53 (fits mod. 5325-5326)
- COV58 (fits mod. 5822-5823-5833)
- COV77 (fits mod. 7726-7745)



PHOTO AND DRONE BACKPACKS



+

=


DRN44 (fits mod. 4419)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.

DRN53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.

<< DRONE
BACKPACKS
Internal removable
pouches for
accessories



>


BPH44 (fits mod. 4419)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.

BPH53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.

<< PHOTO
BACKPACKS
Internal
adjustable
dividers



*Color of the interior fabric may be different.

BACKPACK CABIN

This practical kit adds backpack transportability to the models 5218 and 5221. Generously and ergonomically padded for maximum comfort. Detachable lap belt. Quickly attachable and removable.


>>>

>>>




LID PANELS



PANEXPL27 (fits mod. 2712-17)
Dim. 255x180 mm.
10 1/16 x 7 1/16 in.



PANEXPL33 (fits mod. 3317)
Dim. 310x215 mm.
12 3/16 x 8 7/16 in.



PANEXPL33W (fits mod. 3317W)
Dim. 310x320 mm.
12 3/16 x 12 5/8 in.



PANEXPL38 (fits mod. 3818)
Dim. 375x225 mm.
14 3/4 x 8 7/8 in.



PANEXPL42 (fits mod. 4209-16)
Dim. 405x273 mm.
15 15/16 x 10 3/4 in.



PANEXPL44 (fits mod. 4412-19)
Dim. 422x295 mm.
16 5/8 x 11 5/8 in.



PANEXPL48 (fits mod. 4820)
Dim. 475x325 mm.
18 11/16 x 12 13/16 in.



PANEXPL51 (fits mod. 5117-22)
Dim. 500x230 mm.
19 1/16 x 9 1/16 in.



PANEXPL52 (fits mod. 5218-21)
Dim. 505x270 mm.
19 7/8 x 10 5/8 in.



PANEXPL53 (fits mod. 5325-5326)
Dim. 525x390 mm.
20 11/16 x 15 3/8 in.



PANEXPL58 (fits mod. 5822-23-33)
Dim. 575x395 mm.
22 5/8 x 15 9/16 in.



PANEXPL76 (fits mod. 7630-7641)
Dim. 755x440 mm.
29 3/4 x 17 5/16 in.



PANEXPL77 (fits mod. 7726-7745)
Dim. 720x530 mm.
28 3/8 x 20 7/8 in.

AND PADDED BAGS

Highly durable padded bags with rubber coated handles and waterproof zipper with lockable velcro pull zippers. Practical external front pouch for documents, removable shoulder strap (on certain models) and rubber feet on the bottom to grant better grip. Internal adjustable padded dividers for flexible configurations. Ideal to protect sensitive equipment (ie electronic, photographic, broadcasting, medical etc.)



BAG-R (fits mod. 2712)
Ext. Dim. 275x195x80 mm.
10 13/16 x 7 11/16 x 3 1/8 in.



BAG-S (fits mod. 2717)
Ext. Dim. 275x195x135 mm.
10 13/16 x 7 11/16 x 5 5/16 in.



BAG-T (fits mod. 3317)
Ext. Dim. 325x225x100 mm.
12 13/16 x 8 7/8 x 3 15/16 in.



BAG-U (fits mod. 3317W)
Ext. Dim. 330x350x95 mm.
13 x 13 3/4 x 3 3/4 in.



BAG-E (fits mod. 3818)
Ext. Dim. 375x265x130 mm.
14 3/4 x 10 7/16 x 5 1/8 in.



BAG-PC42 (fits mod. 4209)
Ext. Dim. 425x315x65 mm.
16 3/4 x 12 3/8 x 2 9/16 in.




BAG-PC44 (fits mod. 4412)
Ext. Dim. 455x345x85 mm.
17 15/16 x 13 9/16 x 3 3/8 in.



BAG-A (fits mod. 4419)
Ext. Dim. 445x345x140 mm.
17 1/2 x 13 9/16 x 5 1/2 in.



BAG-F (fits mod. 4820)
Ext. Dim. 480x370x150 mm.
18 7/8 x 14 9/16 x 5 7/8 in.

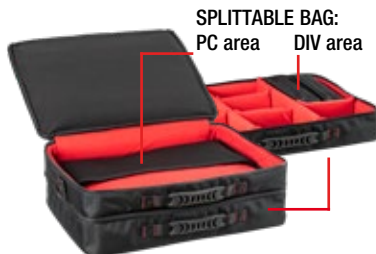

BAG-PC48 (fits mod. 4820)
Ext. Dim. 480x355x165 mm.
18 7/8 x 14 x 6 1/2 in.



BAG-B (fits mod. 5117-5122)
Ext. Dim. 520x275x110 mm.
20 1/2 x 10 13/16 x 4 5/16 in.



BAG-V (fits mod. 5325-5326)
Ext. Dim. 535x400x90 mm.
21 1/16 x 15 3/4 x 3 9/16 in.



BAG-G (fits mod. 5822-5823-5833)
Ext. Dim. 430x285x160 mm.
16 15/16 x 11 1/4 x 6 5/16 in.



BAG-L (fits mod. 7630)
Ext. Dim. 385x250x240 mm.
15 3/16 x 9 13/16 x 9 7/16 in.




BAG-M (fits mod. 7630)
Ext. Dim. 755x240x250 mm.
29 3/4 x 9 7/16 x 9 13/16 in.



BAG-O (fits mod. 7641)
Ext. Dim. 385x240x360 mm.
15 3/16 x 9 7/16 x 14 3/16 in.



BAG-P (fits mod. 7641)
Ext. Dim. 755x240x360 mm.
29 3/4 x 9 7/16 x 14 3/16 in.



Elastic bands with Velcro to help fixing small equipment. Always included with the bags.

*Color of the interior fabric may be different.

TRIPOD BAG

Padded tripod bag in tear resistant fabric. Adjustable shoulder strap and frontal pouch for accessories. Ideal to protect and transport professional tripods for cameras and video cameras.



TRIPOD BAG90

Ext. Dim. 900x170 max/140 min x 100 mm.
35 7/16x6 11/16 max/5 1/2 min x 3 5/16 in.



TRIPODISC

Patented, smart accessory that allows to attach a small or midsize EXPLORECASE to a standard 1/4" thread tripod. The assembly is very easy: just follow the provided instruction, make a hole in the bottom of the case and secure together the two metal discs; the watertight feature remains granted by the discs O-ring.



Developed for any activity where a case needs to be standing at a higher position: laptop computer, drones, audio-video equipment.



NOTEBOOK SLEEVES

Padded notebook sleeve. Available for PC 13"-13.3" and PC 15"-15.6".



TOP ENVELOPE 13

Protective sleeve for PC 13"-13.3"
Ext. Dim. 355x250x30 mm.
14 x 9 13/16 x 1 3/16 in.



TOP ENVELOPE 15

Protective sleeve for PC 15"-15.6"
Ext. Dim. 400x270x30 mm.
15 3/4 x 10 5/8 x 1 3/16 in.



A CASE YOU CAN WEAR

The most innovative backpack carrying system for waterproof cases. A simple concept to quickly turn a case into a backpack. It allows to protect sensitive equipment and at the same time to get all the convenience of a hands-free backpack. Available in 2 sizes.

BACKPACK M FITS MOD. 3317, 3818, 4209 AND 5117


BACKPACK L FITS MOD. 3317W, 4216, 4412, 4419, 4820, 5218 AND 5221



YOUR EXPERIENCE

MOUNTING BRACKETS

Our flexible manufacturing process allows us to easily and efficiently make your OEM case developing specific interiors to meet your requirements.

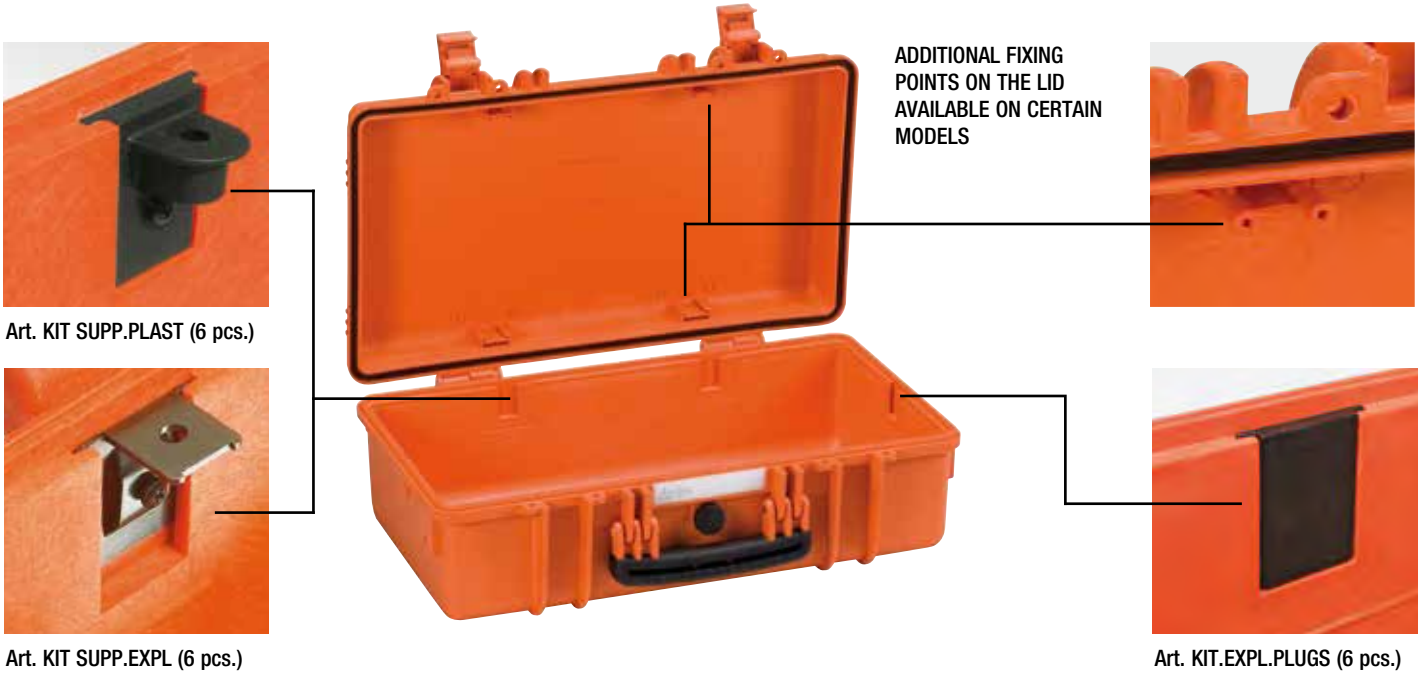

ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS

Art. KIT SUPP.PLAST (6 pcs.)

Art. KIT SUPP.EXPL (6 pcs.)

Art. KIT.EXPL.PLUGS (6 pcs.)

ALL MODELS (EXCEPT FOR THE 1908) ARE INTERNALLY EQUIPPED WITH SPECIFIC SLOTS, TO APPLY THE OPTIONAL METAL OR PLASTIC BRACKETS WHICH PROVIDE EITHER A PANEL'S FIXING POINTS OR A FIX MECHANICAL JOINT INSIDE THE CASE, TO BUILD MORE COMPLETE APPLICATIONS. THIS WAY THE CASE BECOMES A REAL WORKSTATION, RATHER THAN JUST A CARRYING CONTAINER. AS THE PANEL MOUNTING BRACKETS ARE MECHANICALLY FIXED BY SCREWS, THEY CAN BE REMOVED WHEN NECESSARY. THE DEDICATED SCREWS ALLOW THE CASE TO REMAIN WATERPROOF, AND HELP THE PANELS TO BE REMOVED EASILY AND QUICKLY.

THE SLOTS CAN BE CLOSED BY SPECIAL PLASTIC BLIND INSERTS THAT WILL GIVE THE CASE A BETTER AND FINISHED INTERIOR LOOK.

PANEL FRAMES

USER FRIENDLY PANEL FRAMES, THEY CAN BE USED TO FIX SEVERAL KIND OF PANELS, FROM PLASTIC TO ALUMINUM ONES.

EQUIPPED WITH AN ADDITIONAL GASKET, THEY CAN PROVIDE THE CASE WITH A PERFECT INSTRUMENTATION SURFACE AND A FURTHER HUMIDITY AND DUST RESISTANCE WHEN THE CASE IS USED IN THE FIELD. COMPLETELY REMOVABLE, RESISTANT AND LIGHT, THESE PANEL RINGS HELP TO TRANSFORM THE EXPLORER CASES INTO PRACTICAL WORKSTATIONS.



Art. PANRING27, PANRING27.USA, PANRING33, PANRING33.USA, PANRING38, PANRING38.USA, PANRING44, PANRING44.USA, PANRING48, PANRING48.USA, PANRING51, PANRING51.USA.

PADLOCKS

PATENTED PADLOCKS DESIGNED TO FIT SNUG TO THE EXPLORER CASES SHAPE SO AS NOT TO SWING OUT.



TSA LOCK™ PADLOCKS ALLOW AIRPORT SECURITY AGENTS TO OPEN THE CASE WITHOUT DESTROYING THE LOCK.

PATENTED HEAVY DUTY BRASS PADLOCK (Art. EXPL PADLOCK)

PATENTED COMBINATION PADLOCK (Art. EXPL COMBILOCK)

TSA LOCK™ COMBI PADLOCK (Art. EXPL TSA.DIGILOCK)

Our cases can be molded in any color* of your choice or with special copolymer complying with Fire-resistance ratings, ESD, and other specifications. Based on our extensive knowledge in the packaging and protection of delicate instruments, we are able to create the most suitable and cost-effective solutions for your requirements. Do not hesitate to get in touch with us for any technical or commercial query.



OTHER CONTAINERS



WATER RESISTANT



Fold flat carry handle

Self-oiling free running wheels

Art. KIT TRAY MUB
Optional tray with removable divider for tools, instruments or spare parts. MUB78 can fit up to two trays. Elasticated bands for the tray also available (Art. KIT03).

MUB78		L	W	D		
	LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	780	410	330	50	280
	in	30 11/16	16 1/8	13	1 15/16	11
External dim.	mm	807	470	345		
	in	31 3/4	18 1/2	13 9/16		
Weight empty	kg 6,30		lbs 13.88			
Volume	lt 89		gal 23.51			
Buoyancy	kg/max 80,5		lbs/max 177.47			
Versions	MUB78	MUB78.G E	MUB78.D E			
	black empty	mil. green empty	des. sand empty			

- Empty
- Lightweight
- Moulded high impact polypropylene
- Integral lifting points on both ends
- Full length steel hinge pin to lid
- Use in high/low temp environments
- Slide out ID nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points



MUB65		L	W	D		
	LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	653	340	312	65	247
	in	25 11/16	13 3/8	12 5/16	2 9/16	9 3/4
External dim.	mm	678	404	331		
	in	26 11/16	15 7/8	13 1/16		
Weight empty	kg 4,40		lbs 9.70			
Volume	lt 61,5		gal 16.24			
Buoyancy	kg/max 42,7		lbs/max 94.13			
Versions	MUB65	MUB65.G E	MUB65.D E			
	black empty	mil. green empty	des. sand empty			

- Empty
- Lightweight
- Moulded high impact polypropylene
- Integral lifting points on both ends
- Full length steel hinge pin to lid
- Use in high/low temp environments
- Slide out ID nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points



WATER RESISTANT



Free running wheels



GUNCASE		L	W	D		
	LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	925	420	120	60	60
	in	36 7/16	16 9/16	4 3/4	2 3/8	2 3/8
External dim.	mm	1078	475	157		
	in	42 7/16	18 11/16	6 3/16		
Weight empty	kg 7,1		lbs 15.65			
Weight w/foam	kg 8,1		lbs 17.85			
Volume	lt 46,6		gal 12.31			
Versions	GUNCASE.B	GUNCASE.BE	GUNCASE.B CV			
	black conv. foam in the lid flat foam in the bottom	black empty	black convoluted foam in the bottom and the lid			

- 4 easy action quick release "up&over" latches (2 with combi locks)
- Manual pressure release valve



Strong metal carry handle

TECHNICAL SPECIFICATIONS

HEAVENLY LIGHT	CASE CODES	COLORS				WHEELS	INTERNAL CONFIG.	WEIGHT KG	BUOYANCY KG MAX	VOLUME LITRES	INTERNAL DIM. (mm)				EXTERNAL DIM. (mm)				
		BLACK	ORANGE	M.GREEN	D.SAND						L	W	D	LID	BASE	L	W	D	
	1908	BE	OE	GE			EMPTY	0,7			190	125	85	20	65	216	180	102	
		B	O	G			W/FOAM	0,8	1,4	2									
	1913	BE	OE	GE			EMPTY	0,85			190	125	135	20	115	216	180	152	
		B	O	G			W/FOAM	0,92	2,4	3,2									
	2209	BE	OE	GE			EMPTY	0,88			220	160	95	20	75	246	215	112	
		B	O	G			W/FOAM	0,99	2,3	3,3									
	2214	BE	OE	GE			EMPTY	1,16			220	160	145	20	125	246	215	162	
		B	O	G			W/FOAM	1,29	3,9	5,1									
	2712	BE	OE	GE			EMPTY	1,62			276	200	120	35	85	305	270	144	
		B	O	G			W/FOAM	1,83	4,2	6,6									
	2717	BE	OE	GE			EMPTY	1,93			276	200	170	35	135	305	270	194	
		B	O	G			W/FOAM	2,12	6,7	9,3									
	3005	BE	OE	GE	DE		EMPTY	1,1			300	210	58	20	38	326	269	75	
		B	O	G	D		W/FOAM	1,2	2,1	4									
	3317	BE	OE	GE			EMPTY	2,29			330	234	170	68	102	360	304	194	
		B	O	G			W/FOAM	2,51	7	13,1									
	3317W	BE					EMPTY	2,92			330	350	170	68	102	360	420	194	
		B					W/FOAM	3,3	10,6	19,6									
	3818	BE	OE	GE			EMPTY	3,14			380	270	180	47	133	410	340	205	
		B	O	G			W/FOAM	3,58	12,4	18,4									
	4209	BE	OE	GE	DE		EMPTY	2,2			420	300	95	35	60	457	366	118	
		B	O	G	D		W/FOAM	2,6	6,8	12									
	4216	BE	OE	GE	DE		EMPTY	2,6			420	300	160	35	125	457	366	183	
		B	O	G	D		W/FOAM	3,2	14,2	20,6									
	4412	BE	OE	GE			EMPTY	3,4			445	345	125	47	78	474	415	149	
		B	O	G			W/FOAM	3,9	10,7	19,2									
		BC		GC			W/PC BAG	4,2											
	4419	BE	OE	GE			EMPTY	4			445	345	190	47	143	474	415	214	
		B	O	G			W/FOAM	4,7	19,7	29,2									
	4820	BE	OE	GE			EMPTY	4,64			480	370	205	50	155	520	435	230	
		B	O	G			W/FOAM	5,4	24,7	35,5									
	5117	BE	OE	GE			EMPTY	3,8			517	277	173	50	123	546	347	197	
		B	O	G			W/FOAM	4,5	15,8	24,7									
	5122	BE	OE	GE		YES	EMPTY	6			517	277	217	50	167	546	347	247	
		B	O	G			W/FOAM	7	21,5	31									
	5140	BKT01.AH				YES	W/FOAM FILLED DRAWERS	13											
		BKT02.AH					W/EMPTY DRAWERS	13,8									581	381	455
		BKT03.AH					W/EMPTY DRAWERS	13,8											
		BKTE.AH					AIDRAW READY	9,75											
		BE.AH					COMPLETELY EMPTY	7,52											
		X.B					AIBOX READY	9,75											
	5218	BE	OE	GE	DE	YES	EMPTY	3,75			520	285	180	30	150	550	350	200	
		B	O	G	D		W/FOAM	4,3	20	26									
	5221	BE	OE	GE	DE	YES	EMPTY	3,9			520	285	205	55	150	550	350	225	
		B	O	G	D		W/FOAM	4,5	20	30,3									
	5325	BE	OE	GE			EMPTY	7			538	405	250	60	190	607	475	275	
		B	O	G			W/FOAM	8,25	37,2	53									
	5326	BE	OE	GE		YES	EMPTY	10			538	405	250	60	190	627	475	292	
		B	O	G			W/FOAM	11,25	37,2	53									
	5822	BE	OE	GE			EMPTY	7,16			580	440	220	60	160	650	510	245	
		B	O	G			W/FOAM	8,39	36,7	56,1									
	5823	BE	OE	GE		YES	EMPTY	9,17			580	440	220	60	160	670	510	262	
		B	O	G			W/FOAM	10,4	36,7	56,1									
	5833	BE	OE	GE		YES	EMPTY	10,54			580	440	330	60	270	670	510	372	
		B	O	G			W/FOAM	12,65	62	84,2									
	7626	BE	OE	GE	DE	YES	EMPTY	7,7			763	399	260	50	210	832	466	279	
		B	O	G	D		W/FOAM	9,5	57,5	79,2									
	7630	BE	OE	GE		YES	EMPTY	13,56			765	485	305	60	245	860	560	355	
		B	O	G			W/FOAM	16,39	81,8	113,1									
	7635	BE	OE	GE	DE	YES	EMPTY	9,4			763	399	350	50	300	832	466	369	
		B	O	G	D		W/FOAM	11,8	82,2	106,6									
	7641	BE	OE	GE		YES	EMPTY	15,02			765	485	415	60	355	860	560	460	
		B	O	G			W/FOAM	18,87	118,5	153,9									
	7726	BE	OE	GE		YES	EMPTY	10,3			770	580	265	90	175	836	641	304	
		B	O	G			W/FOAM	12,6	70	118									
	7745	BE	OE	GE		YES	EMPTY	15,5			770	580	450	90	360	836	641	489	
		B	O	G			W/FOAM	19,8	144	200									
	7814	BE		GE	DE		EMPTY	5,5			780	350	145	42	103	846	427	167	
		B		G	D		W/FOAM	6,4	25,3	39,6									
	9413	BE		GE	DE	YES	EMPTY	6,7			936	350	135	42	93	987	414	158	
		B		G	D		W/FOAM	7,7	27,9	45,3									
	9433	BE	OE	GE	DE	YES	EMPTY	10,2			936	350	330	42	288	1009	412	354	
		B	O	G	D		W/FOAM	12,7	84,9	108									
	11413	BE		GE	DE	YES	EMPTY	7,8			1136	350	135	42	93	1189	415	159	
		B		G	D		W/FOAM	8,8	33,3	53,7									
	13513	BE		GE	DE	YES	EMPTY	8,7			1350	350	135	42	93	1430	415	159	
		B		G	D		W/FOAM	9,95	39,5	63,7									
	13527	BE		GE	DE	YES	EMPTY	11,7			1350	350	272	42	230	1430	415	296	
		B		G	D		W/FOAM	14,9	97,5	128,5									
	15416	BE		GE	DE	YES	EMPTY	11,3			1540	377	160	42	118	1629	456	183	
		B		G	D		W/FOAM	13,4	61,6	92,9									
	10826	BE				YES	EMPTY	17			1080	620	260	60	200	1178	725	287	
		B					W/FOAM	20,4	120,6	174									
	10840	BE		GE		YES	EMPTY	19,8			1080	620	400	200	200	1178	718	427	
		B		G			W/FOAM	26,3	120,6	260									

Nato Stock Numbers (NSN) available on demand.

* Maximum weight capacity when contents are evenly distributed that maintains buoyancy level just below the lid closure line.

** For models 5122, 5822, 5823 and 5833 the internal dimensions given are calculated on the deepest bottom area. However, the depth is shallower in places where allowance is made for the wheel wells and the telescopic handle well.

Distributed by:



GT LINE srl
Via del Lavoro, 9 - Loc. Crespellano
40053 Valsamoggia (Bo) - Italy
Tel. +39 051 65041 - Fax +39 051 734925
www.explorercases.com - sales@explorercases.com

